

TS-C50-1000/T

Order No. 0163470



TS-C30-700/T

Order No. 0163720



TS-C20-500/T

Order No. 0163730




TS-C10-300/T

Order No. 0163740



Weatherproof PA Column Speakers, with EN 54-24 certification.

- 100 V transmission technology
- 7.7 cm (3") waterproof full range speaker in different quantities
- Connection via ceramic terminals with thermal fuse in the cabinet
- 2 x PG9 cable gland
- Robust, plastic-coated aluminium cabinet with front protective grille
- The speaker complies with British Standard BS 5839, Part 8
- Supplied with plastic wall bracket for pivoting and tilting

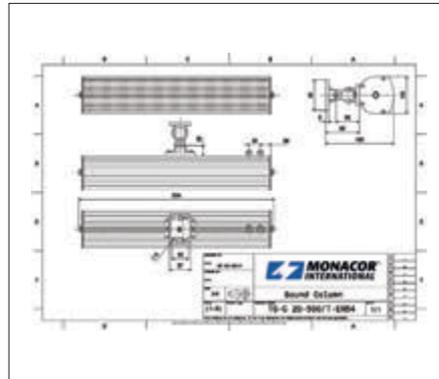

Model	TS-C50-1000/T	TS-C30-700/T	TS-C20-500/T	TS-C10-300/T
Power rating (RMS)	50/30/15/7.5 W	30/15/7.5 W	20/15/10/5 W	10/6/3/1.5 W
Frequency range	200-20,000 Hz	200-17,000 Hz	200-17,000 Hz	200-18,000 Hz
Number of built-in speakers	8	6	4	2
SPL	100 dB/W/m	97 dB/W/m	97 dB/W/m	95 dB/W/m
Beam angle	H: 173°/V: 17°	H: 160°/V: 26°	H: 149°/V: 38°	H: 149°/V: 66°
Admiss. ambient temp.	-20 °C to +90 °C			
Dimensions	100 x 971 x 92 mm	100 x 700 x 92 mm	100 x 510 x 92 mm	100 x 296 x 92 mm
Weight	5.1 kg	3.8 kg	2.8 kg	1.6 kg

ETS-360TW/WS

Order No. 0162270



High-end column speaker, (indoors), 100 V. Column speaker in a wooden cabinet of compact size, coated with high-quality foils in decorative wood pattern, 2½-way technology with tweeter (25 mm textile dome), clearly extended frequency range compared with standard full range column speakers. The ETS-360TW/WS speaker impresses with an incredibly dynamic and complete sound, a convincing speech intelligibility and an amazing sound even at higher volume levels.

- 2 bass speakers, 4 bass-midrange speakers, 1 tweeter
- Spring-loaded terminal with 3 power taps
- 2 x M8 threaded bushing
- Supplied with mounting bracket
- Metal front grille

Model	ETS-360TW/WS
Power rating (RMS)	60/30/15 W
Frequency range	90-19,000 Hz
Number of speakers	6+1
SPL	94 dB/W/m
Dimensions	135 x 825 x 110 mm
Weight	7.3 kg



ETS-340TW/WS

Order No. 0162250



High-end column speaker, (indoors), 100 V. Column speaker in a wooden cabinet of compact size, coated with high-quality foils in decorative wood pattern, 2½-way technology with tweeter (25 mm textile dome), clearly extended frequency range compared with standard full range column speakers. The sound is ideally matched to the reproduction of both music and vocals.

- 4 bass speakers, 2 bass-midrange speakers, 1 tweeter
- Spring-loaded terminal with 3 power taps
- 2 x M8 threaded bushing
- Supplied with mounting bracket
- Metal front grille

Model	ETS-340TW/WS
Power rating (RMS)	40/20/10 W
Frequency range	100-19,000 Hz
Number of speakers	6+1
SPL	92 dB/W/m
Dimensions	95 x 500 x 120 mm
Weight	3.5 kg

